


NEW CYLINDRICAL EMPTIER


Opening And Cleaning

Tools Needed. An Adjustable wrench and channel locks.

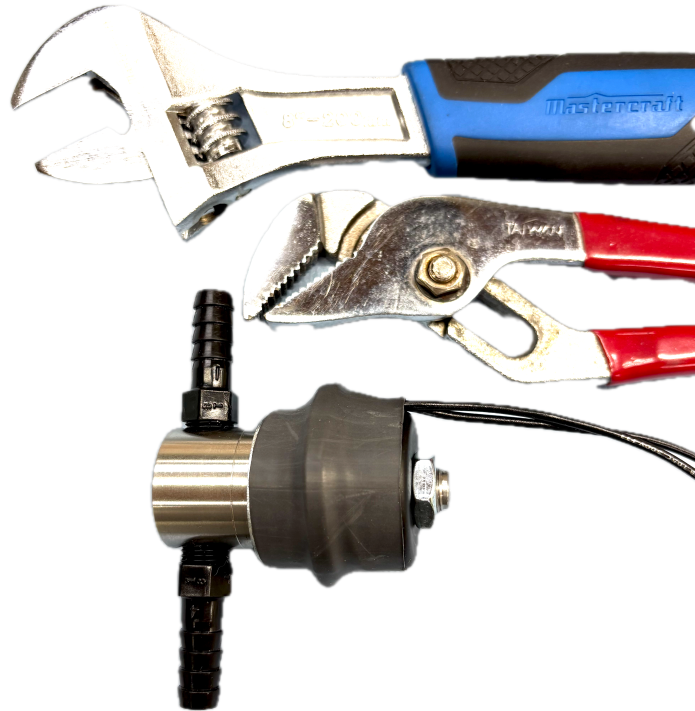



Remove The Nut. Be Careful To Not Damage The Wires.



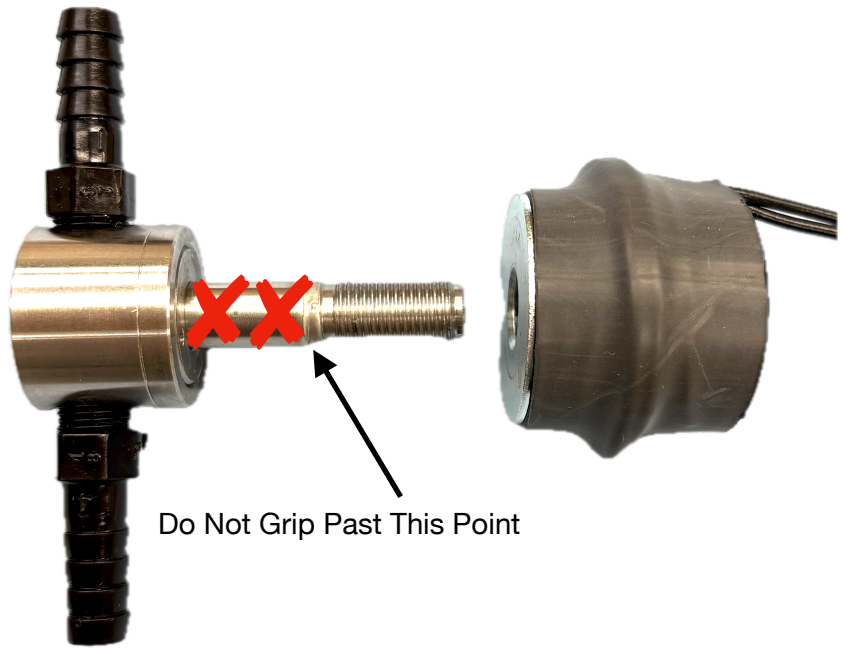


Do Not Grip Past This Point

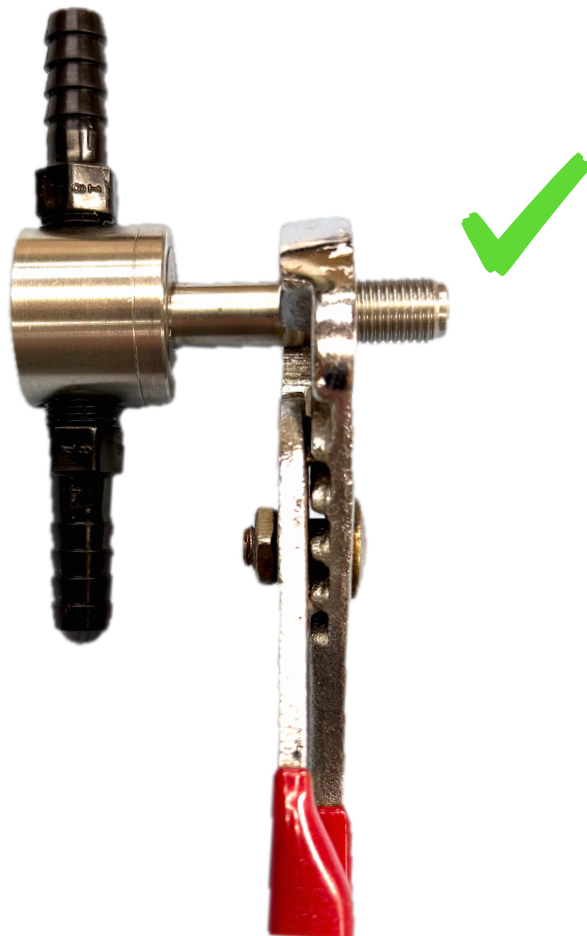

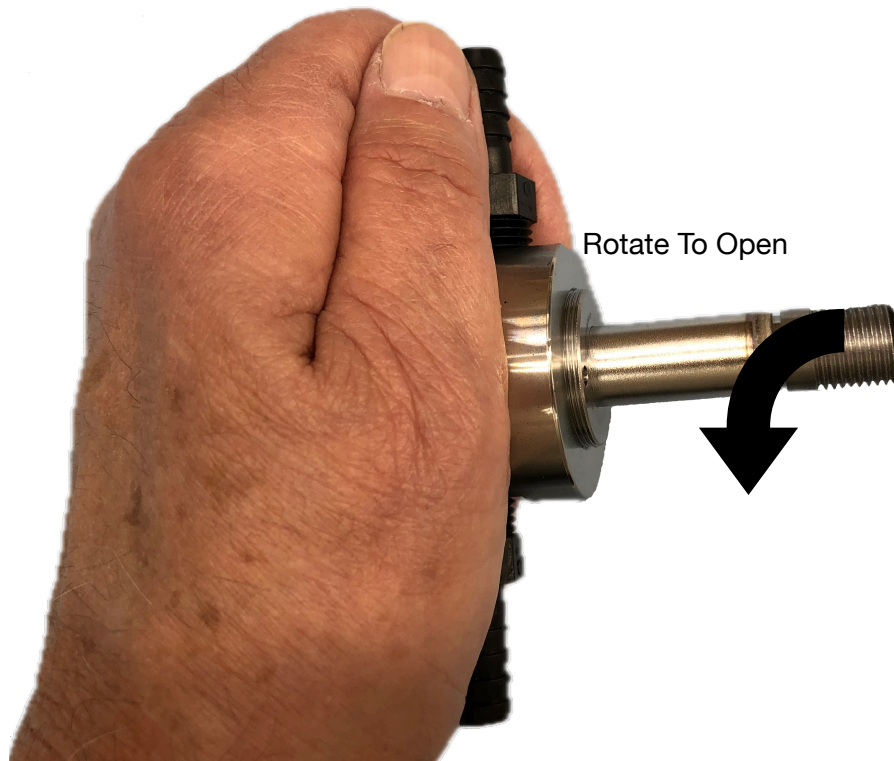

Rotate To Open

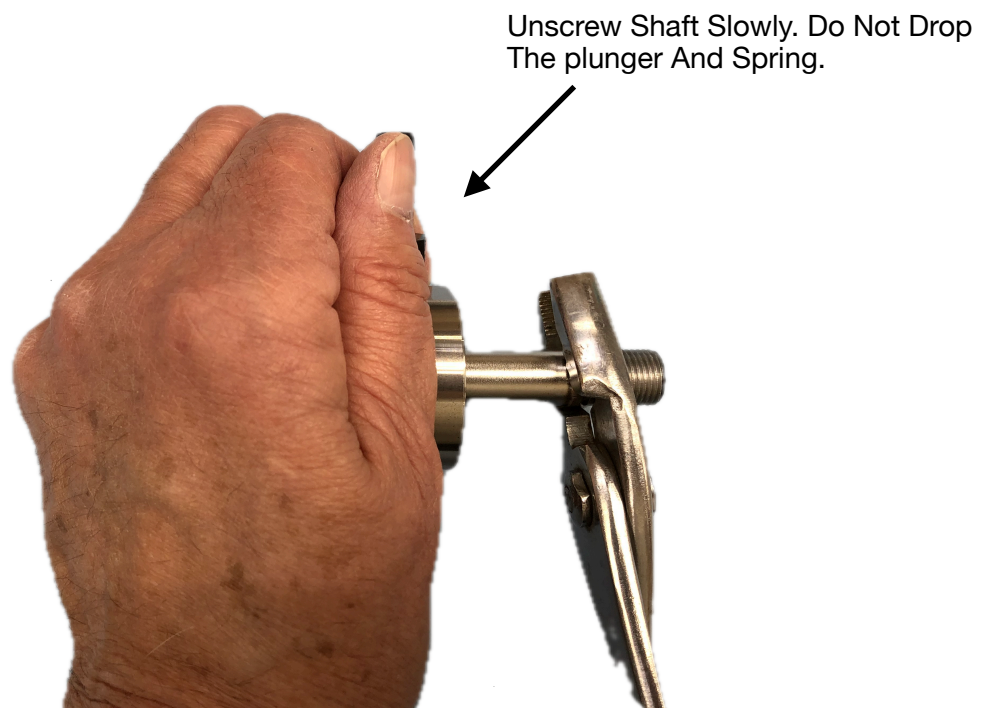

Unscrew Shaft Slowly. Do Not Drop
The plunger And Spring.

Take Care To Not Damage The "O" Ring.
Or The Emptier Will Leak

The Plunger, Spring, And Inside The Shaft
May Also Need Cleaning. Occasionally They May
Need To Be Soaked Overnight In OvenCleaner &
Scrubbed To Breakup Heavy Buildup.

The Small Rubber Pad On The End Of The Plunger
Must Be Clear Of Debris. Do Not Damage It.

The Orifice (Hole) And The Chamber Around It Will Also Need To
Be Cleaned Of Debris And Crystals. Take Care So As To Not
Damage The Raised Ring Around The Hole.




After Cleaning, Carefully Reseat The "O" Ring As
Shown. Insert The Plunger And Spring Into The Shaft.



Reassemble In The Reverse Order And Tighten As Shown Below.

DO NOT USE EXTREME FORCE.

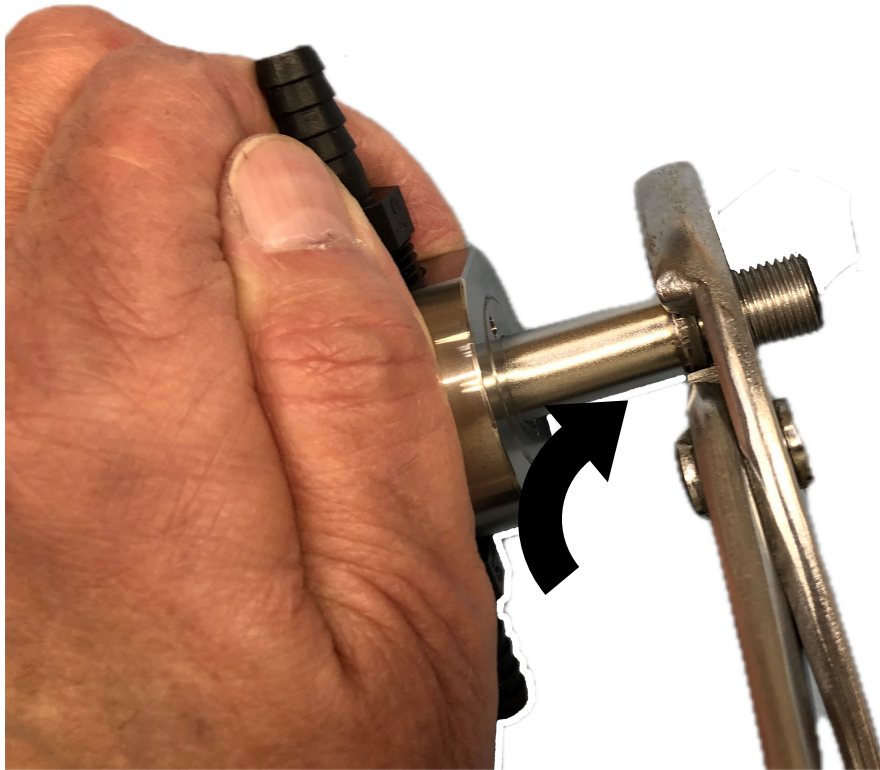

Align The Coil And Barbed Fitting Vertically So The “IN” Is At The Top Before Tightening The Nut.